



HEKO GLK-Coal feeder chain wheels toothed and toothless


Wheels for forged link chains type RLA, RLA-R and RLE

- **Welded design**
- **Hardened teeth**

HEKO supplies many different designs of wheels for forged link chains. HEKO recommends the use of drive wheels with replaceable rims, manufactured from alloy steel with

contact surfaces hardened and carbon steel hub. Wheels can also be made from stainless steel. We recommend toothless reversing wheels for single-strand conveyors. Toothed reversing wheels are recommended for double-strand conveyors – due to the asymmetric design of the chain links.

A perfect adjustment between the chain link and sprocket / wheel ensures the highest service life.

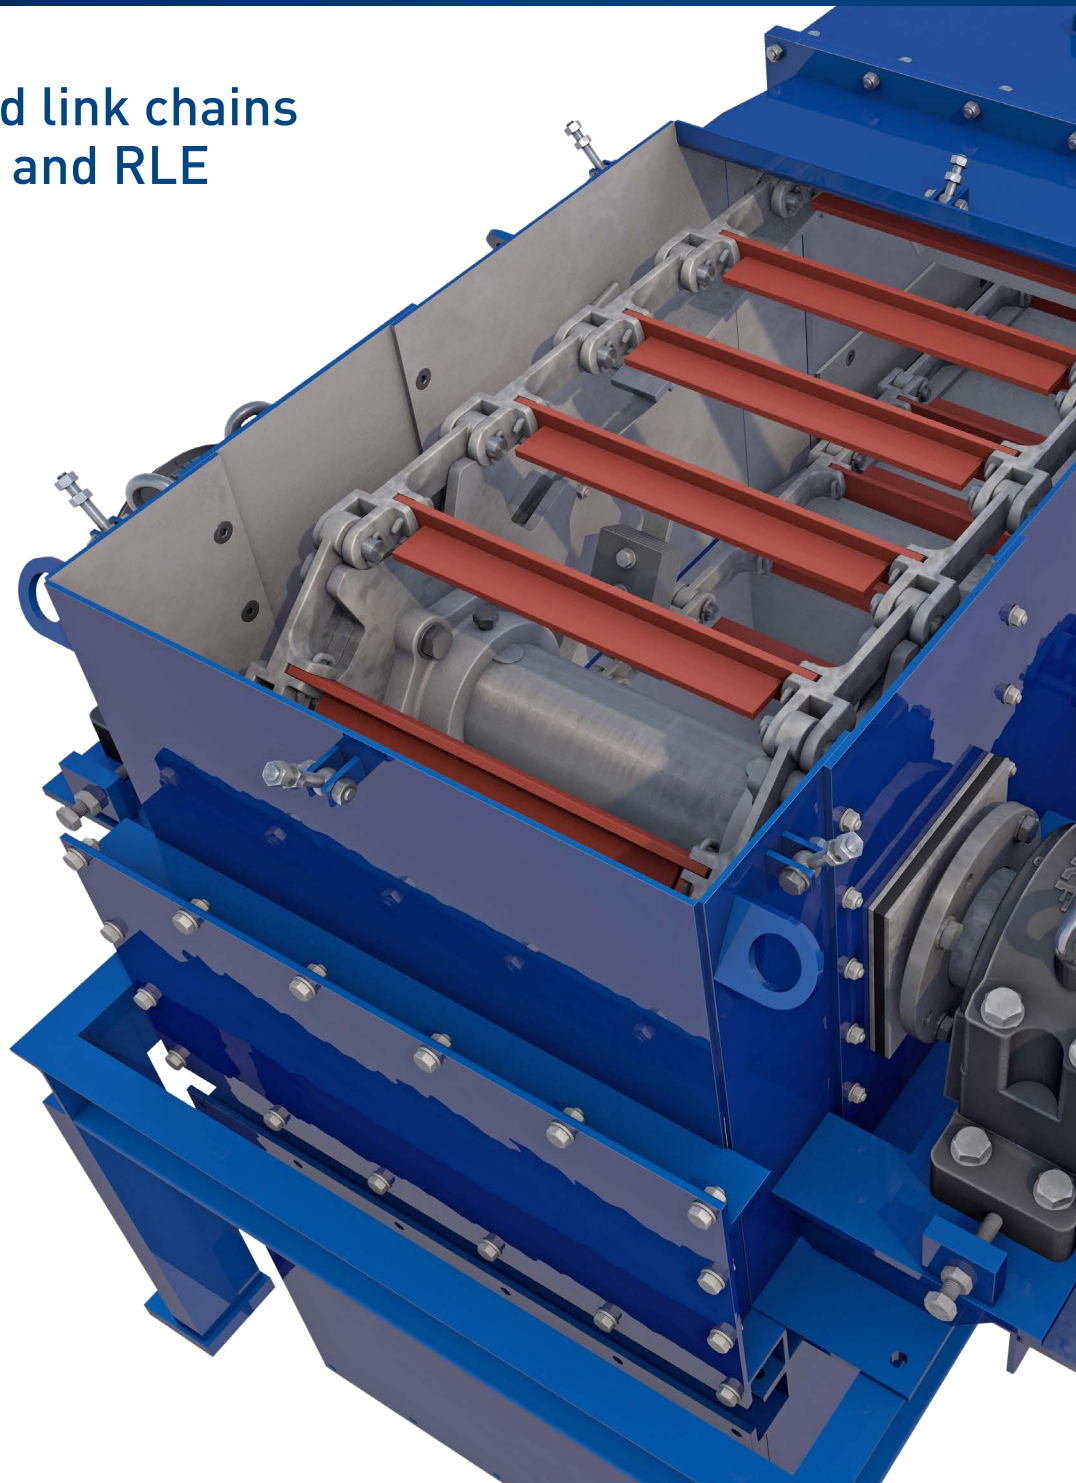




HEKO GLK-Coal feeder chain wheels toothed and toothless



HEKO Wheels for forged link chains, toothed

to suit chain, type (mm) p x h x s	number of teeth	dimensions (mm)			
		pitch circle diameter Tk Ø	outside diameter Ta	a	b
101.6 x 36 x 12	6	203.20	216	14	38
	8	265.50	275		
	10	328.80	340		
	12	392.60	405		
142 x 50 x 19	6	284.00	304	20	50
	8	371.06	390		
	10	459.52	470		
142 x 50 x 25	6	284.00	304	20	56
	8	371.06	390		
	10	459.52	470		
142 x 50 x 29	6	284.00	304	20	60
	8	371.06	390		
	10	459.52	470		
160 x 50 x 25	8	418.09	445	20	56
	10	517.77	545		
175 x 60 x 30	8	457.29	500	24	74
	10	566.31	610		
200 x 60 x 30	8	522.40	565	24	64
	10	647.40	690		
250 x 70 x 30	8	653.27	690	24	74
260 x 75 x 30	8	679.40	710	26	76


Other dimensions and qualities on request

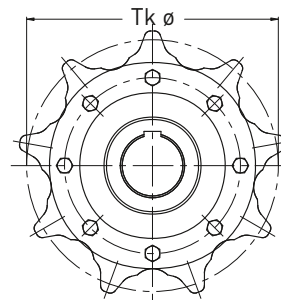

HEKO chain wheel type RLA-R with symmetric teeth, reversible operation

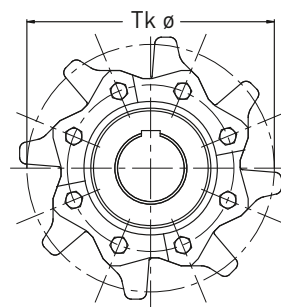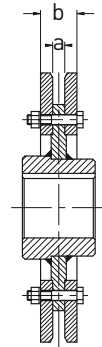

HEKO chain wheel type RLA for forged link chains model 69226

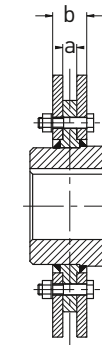



HEKO GLK-Coal feeder chain wheels toothed and toothless


HEKO Wheels for forged link chains, toothless

to suit chain, type	dimensions (mm)		
	outside diameter		
p x h x s	Ta	a	b
101,6 x 36 x 12	160	15	39
	229		
	295		
	376		
142 x 50 x 19	234	20	50
	320		
	415		
	535		
142 x 50 x 25	234	20	56
	320		
	415		
	535		
142 x 50 x 29	234	20	60
	320		
	415		
	535		
160 x 50 x 25	365	20	56
	480		
175 x 60 x 30	425	24	74
	535		
200 x 60 x 30	490	24	74
	615		
250 x 70 x 30	580	24	74
	610		

Other dimensions and qualities on request



Toothless split reversing chain wheels

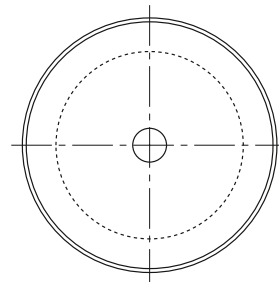

HEKO chain wheel type RLE, toothless for forged link chains

